



Key Features

- NSF/ANSI 2 Certified Shatter Shield prevents and protects in case of breakage
- 9W~14.5W with 1150/2100lm
- DLC Listed
- Suitable for splash zones of food equipment
- External ballast not required
- High CRI (83+)
- 50,000 hour life
- Replacement for T8 linear fluorescent
- Excellent distribution with 180° beam angle
- Fits into existing linear fixtures



Conforms to
NSF/ANSI 2

Applications

- Offices
- Hospitality
- Retail
- Shopping Malls
- Restaurants


General Usage

- Ideal replacement of Fluorescent T8 & T12 tubes

Other information

- Sockets must be non shunted
- Operating temperature range between -20°C and +45°C
- UL/cUL listed, RoHS compliant
- 5-year limited warranty for DLC approved lamps / 3-year limited warranty for non-DLC in commercial and residential use

Dimensions

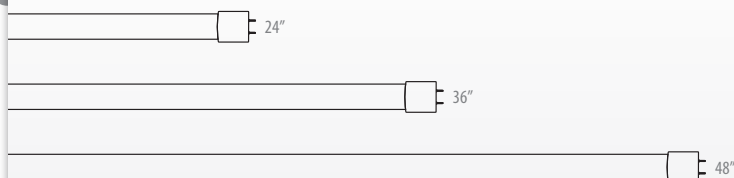

Order Code	Model Number	Description	DLC	Watts	Base	Voltage (V)	Initial Lumens	Beam Angle	CCT (K)	CRI	MOL (in)	CS QTY
Linear Tubes (Shatterproof)												
1762771	VIV-T8BPSP4/9W/30/F	T8 Bypass 2ft 9W G13 30K Frost Shatterproof DLC4.0		9	G13	120-277	1150	180°	3000	83	24	25
1762356	VIV-T8BPSP4/9W/35/F	T8 Bypass 2ft 9W G13 35K Frost Shatterproof DLC4.0		9	G13	120-277	1200	180°	3500	83	24	25
1762853	VIV-T8BPSP4/9W/40/F	T8 Bypass 2ft 9W G13 40K Frost Shatterproof DLC4.0		9	G13	120-277	1200	180°	4000	83	24	25
1762534	VIV-T8BPSP4/9W/50/F	T8 Bypass 2ft 9W G13 50K Frost Shatterproof DLC4.0		9	G13	120-277	1250	180°	5000	83	24	25
1762296	VIV-T8BPSP4/12W/30/F	T8 Bypass 3ft 12W G13 30K Frost Shatterproof	-	12	G13	120-277	1200	180°	3000	83	36	25
1762311	VIV-T8BPSP4/12W/35/F	T8 Bypass 3ft 12W G13 35K Frost Shatterproof	-	12	G13	120-277	1200	180°	3500	83	36	25
1762484	VIV-T8BPSP4/12W/40/F	T8 Bypass 3ft 12W G13 40K Frost Shatterproof	-	12	G13	120-277	1200	180°	4000	83	36	25
1762514	VIV-T8BPSP4/12W/50/F	T8 Bypass 3ft 12W G13 50K Frost Shatterproof	-	12	G13	120-277	1300	180°	5000	83	36	25
1762746	VIV-T8BPSP4/12.5W/30/F	T8 Bypass 4ft 12.5W G13 30K Frost Shatterproof DLC4.0		12.5	G13	120-277	1650	180°	3000	83	48	25
1762342	VIV-T8BPSP4/12.5W/35/F	T8 Bypass 4ft 12.5W G13 35K Frost Shatterproof DLC4.0		12.5	G13	120-277	1650	180°	3500	83	48	25
1762833	VIV-T8BPSP4/12.5W/40/F	T8 Bypass 4ft 12.5W G13 40K Frost Shatterproof DLC4.0		12.5	G13	120-277	1750	180°	4000	83	48	25
1762527	VIV-T8BPSP4/12.5W/50/F	T8 Bypass 4ft 12.5W G13 50K Frost Shatterproof DLC4.0		12.5	G13	120-277	1800	180°	5000	83	48	25
1763231	VIV-T8BPSP4/14.5W/30/F	T8 Bypass 4ft 14.5W G13 30K Frost Shatterproof DLC4.0		14.5	G13	120-277	1900	180°	3000	83	48	25
1763313	VIV-T8BPSP4/14.5W/35/F	T8 Bypass 4ft 14.5W G13 35K Frost Shatterproof DLC4.0		14.5	G13	120-277	1950	180°	3500	83	48	25
1763432	VIV-T8BPSP4/14.5W/40/F	T8 Bypass 4ft 14.5W G13 40K Frost Shatterproof DLC4.0		14.5	G13	120-277	2000	180°	4000	83	48	25
1763512	VIV-T8BPSP4/14.5W/50/F	T8 Bypass 4ft 14.5W G13 50K Frost Shatterproof DLC4.0		14.5	G13	120-277	2100	180°	5000	83	48	25

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How to read: VIV / T8 BP SP4 / 9W / 30 / F
      

Distributed by: